

Elegante & Forester

APEX Windows

8800PD & 8200PD

THERMAL PERFORMANCE PACKAGES

HEATSEAL® DELUXE

VINYL FRAME • FOAM FILL • LOW-E GLASS
1" DOUBLE PANE IGU • ARGON GAS (90)

No Grids



Okna Windows & Doors

215-788-7000

8800PD - Elegante Patio Door Catalog Size (8800PD)
Vinyl Frame • 1" Insulated Glass Unit • Low-E High
Perf. Glass with Argon Gas
Sliding Glass Doors



CERTIFIED

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
0.27	0.27

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	Air Leakage (U.S./I-P)
0.49	≤ 0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org

HEATSEAL® TRIPLE DELUXE XR13

VINYL FRAME • FOAM FILL • LOW-E GLASS
1 3/16" TRIPLE PANE IGU • ARGON GAS (90)

No Grids



Okna Windows & Doors

215-788-7000

8800PD - Elegante Patio Door Catalog Size (8800PD)
Vinyl Frame • 1 3/16" Insulated Glass Unit • Triple
Low-E IG • Argon Gas
Sliding Glass Doors



CERTIFIED

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
0.20	0.23

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	Air Leakage (U.S./I-P)
0.38	≤ 0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org



ENERGY STAR® Certified
in All 50 States

HEATSEAL® TRIPLE DELUXE XR14

VINYL FRAME • FOAM FILL • LOW-E GLASS
1 3/16" TRIPLE PANE IGU • KRYPTON GAS (90)

No Grids



Okna Windows & Doors

215-788-7000

8800PD - Elegante Patio Door Catalog Size (8800PD)
Vinyl Frame • 1 3/16" Insulated Glass Unit • Triple
Low-E IG • Krypton Gas
Sliding Glass Doors



CERTIFIED

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
0.17	0.23


ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	Air Leakage (U.S./I-P)
0.38	≤ 0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org



ENERGY STAR® Certified
in All 50 States

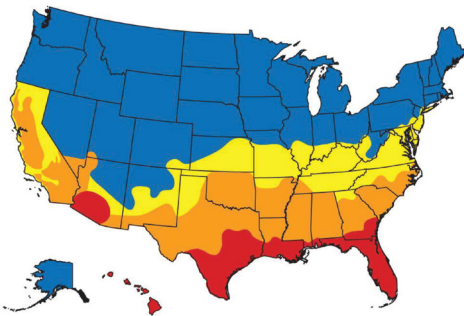

- Northern
- South-Central
- North-Central
- Southern



SUNSEAL®

VINYL FRAME • HIGH PERF. GLASS
1" DOUBLE PANE IGU • ARGON GAS (90)

No Grids



Okna Windows & Doors

215-788-7000

8800PDC - Elegante Patio Door Custom Size (8800PDC)
Vinyl Frame • 1" Insulated Glass
Unit • Sun Seal High Perf. Glass • Argon Gas
Sliding Glass Doors



CERTIFIED

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
0.28	0.19

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	Air Leakage (U.S./I-P)
0.38	≤ 0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org



QUALIFICATION:

- South-Central
- Southern

SUNSEAL® DELUXE

VINYL FRAME • FOAM FILL • HIGH PERF. GLASS
1" DOUBLE PANE IGU • ARGON GAS (90)

No Grids



Okna Windows & Doors

215-788-7000

8800PDC - Elegante Patio Door Custom Size (8800PDC)
Vinyl Frame Foam Filled • 1" Insulated Glass
Unit • Sun Seal High Perf. Glass • Argon Gas
Sliding Glass Doors



CERTIFIED

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)	Solar Heat Gain Coefficient
0.27	0.19

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	Air Leakage (U.S./I-P)
0.38	≤ 0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult Manufacturer's literature for other product performance information. www.nfrc.org



QUALIFICATION:

- South-Central
- Southern

THERMAL PERFORMANCE PACKAGE

	U-Value	SHGC	VT	Condensation Resistance
CLEAR/CLEAR	0.43	0.54	0.57	46
HEATSEAL®	0.28	0.27	0.49	62
HEATSEAL® DELUXE	0.27	0.27	0.49	63
HEATSEAL® TRIPLE DELUXE XR13 (1 3/16" - Argon Gas)	0.20	0.23	0.38	72
HEATSEAL® TRIPLE DELUXE XR14 (1 3/16" - Krypton Gas)	0.17	0.23	0.38	72
SUNSEAL®	0.28	0.19	0.38	62
SUNSEAL® DELUXE	0.27	0.19	0.38	63

Numbers are based off of windows tested without grids. For windows with grids, please contact your certified dealer to obtain thermal performance numbers.

When you purchase a window or patio door that is advertised as the most energy efficient, you want to be sure the claims are based on facts, certified by a truly independent and objective authority. Their unbiased test results allow homeowners to make a more educated choice.

All OKNA windows and doors meet rigorous North American Fenestration Standard (NAFS).


Certification is performed by **The Keystone Certification Program** that is ANSI-accredited to ensure that our products are manufactured as represented by their certifications, which are based on tests performed by accredited laboratories in accordance with the AAMA/WDMA/CSA 101/IS2/A440 – North American Fenestration Standard (NAFS). The NAFS standard defines a rating scale for fenestration product performance, and requires that components used in window & door assemblies also meet stringent component standards. Certification includes annual inspections to ensure the factory quality management system also meets rigid standards – that translates to homeowner peace of mind.



STRUCTURAL PERFORMANCE

	Industry Minimum	OKNA 8800PD/8200PD	Comparison to Industry Minimum
NAFS Rating Residential Grade Performance for air/water/structural.	R15	R60	
Air Infiltration (cfm/ft²) at speeds of 25mph.	0.3	0.06	500% better
Water Penetration (mph) 8" per hour.	33	59	79% better
Structural Integrity Design Pressure (DP) Wind (mph) durability before breaking.	94	187	99% better

Air Infiltration

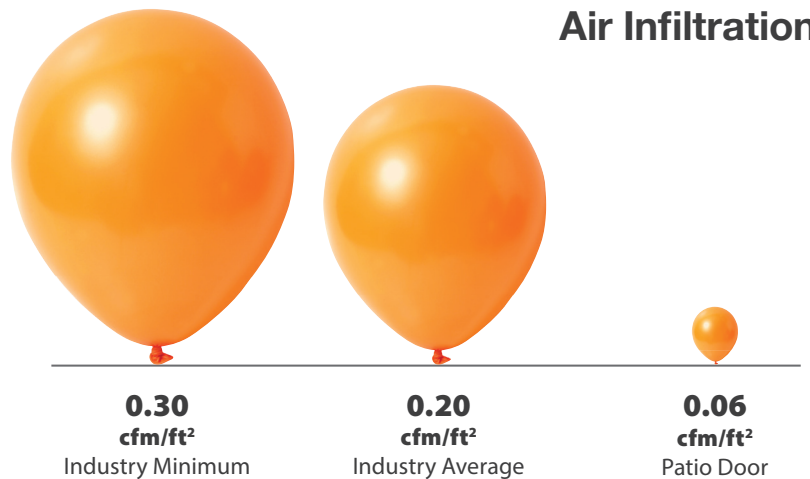

The results are based on a tested window sample by AAMA testing window guidelines. Title of Test & Method: Air Infiltration - ASTM E 283 75 PA - (1.6 psf) 25 mph